


Fleet Tracker MGS100 Self-Install

INSTALLATION GUIDE

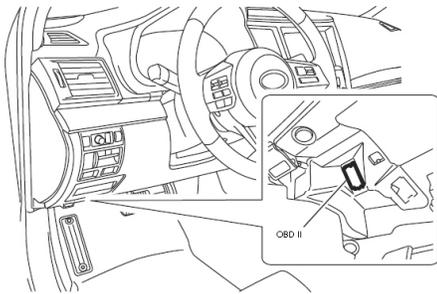

KIT INCLUDES:

- MGS Device
- OBD-II Cable
- 4 Zipties



- STEP 1** Locate the OBD-II Port in your vehicle which is usually under the dashboard left of your steering wheel. Or consult your owner's manual to locate it.
- STEP 2** Connect the OBD-II connector on the MGS to the OBD-II socket in your vehicle.
- STEP 3** Secure the MGS and the wiring under the dashboard to avoid breakage. The MGS must be installed with the label facing the sky with the MGS as close to the top of the dashboard as possible and kept clear of foot pedals.
- STEP 4** Login into Fleet Complete Application and update the asset with Vehicle ID, VIN and Odometer reading.

WARNING:

The device and all related cabling must be securely fastened and kept clear of all vehicle controls, including throttle, brake and clutch pedals, as any loose cabling or devices may impede the use of vehicle controls, which could lead to serious injury or death.

LED SIGNALS

GREEN OFF	Power down mode	RED 2 - 2	Not Activated
GREEN FLASH	Low power mode	RED 2 - 3	No HSPA Signal
GREEN SLOW	Full pwr Ignition OFF	RED 2 - 4	Network not found
GREEN FAST	Full pwr Ignition ON	RED 3 - 1	GPS Module Fault
RED OFF	No fault detected	RED 3 - 2	GPS Antenna open/short
RED 1 - 1	License key expired	RED 3 - 3	GPS no track (0 seats)
RED 2 - 1	HSPA Module Fault	RED 3 - 4	GPS no fix (< 3 seats)
		RED 3 - 5	GPS no time